

# Process Signal Integrator DIN400

**Function:** Precision electronic instrument for the integration of electrical quantities against time giving a 24 Volt DC pulse and an open collector output suitable for operation of an electro-mechanical impulse counter, etc. The DIN400 can be used for any application where time-varying signals require integrating. For instance:– Flow, Mass Flow (Liquids, Solids or Gases), Electric Charge, etc.

**Application Notes:** If the DIN400 is required to work from low level signals then it can be preceded by a BD300 signal amplifier. Similarly the DIN400 can accept square law signals from differential pressure/flow transmitters if preceded by a DIN500 Square Root Extractor.



## SPECIFICATIONS

Please note that the following are typical ranges. We also manufacture instruments to cater for other ranges, within limitations detailed below. All instruments come with span and zero potentiometers for fine tuning on site.

### INPUTS:

#### DC Current

- 0 to 1mA into 100 ohms
- 0 to 10mA into 10 ohms
- 4 to 20mA into 10 ohms
- 10 to 50mA into 10 ohms
- Other ranges as required

#### DC Voltage

- Between 0 and 250 Volts DC
- Minimum voltage span 100 mV
- Maximum voltage span 250 Volts

#### Input Impedance

- 100K ohm or greater for inputs of greater than 1 Volt DC

### OUTPUTS:

#### Output Pulse

- 1) 24 Volt DC 40mS wide, derived from an Open Collector and internal supply, and
  - 2) Opto Coupler, 40mS wide
- Maximum sink current 5mA  
Maximum voltage 30 Volts  
Isolated from input and supply

#### Output Count Rate

- Minimum 120 counts per hour  
2 counts per minute  
Maximum 12,000 counts per hour  
200 counts per minute  
– internally switch selectable

#### Loading

- 150 ohms minimum DC resistance  
160mA maximum suitable for one electro-mechanical counter

### SUPPLY:

#### Power Supply Voltage

- User selectable  
115 Volt AC  $\pm 15\%$  50/60 Hz  
230 Volt AC  $\pm 15\%$  50/60 Hz

#### Power Required

- 3VA Maximum

#### Pilot Light

- Red LED shows Power ON

### GENERAL:

#### Linearity Error

- Pulse rate proportional to input  
 $\pm 0.1\%$  of span

#### Temperature Coefficient

- $\pm 0.1\%$  of span /  $\Delta 10^\circ\text{C}$

#### Operating Temperature Range

- 0 to  $+50^\circ\text{C}$

#### Storage Temperature Range

- $-20$  to  $+60^\circ\text{C}$

#### Operating Humidity Range

- 0 to 95% RH non-condensing


#### Storage Humidity Range

- 0 to 95% RH non-condensing

#### Weight

- 320 gms

## MECHANICAL DETAILS

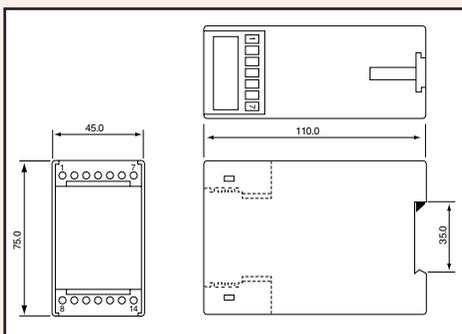

## TERMINATION DETAILS

### Terminal

- 1 Input -ve
- 2 Input +ve
- 3 Test Point
- 4  Opto Coupler Output
- 5  Counter Output -ve
- 6 Counter Output -ve
- 7 Counter Output +ve

### Terminal

- 8 Unused
- 9 Unused
- 10 Unused
- 11 Unused
- 12 230 Volt  $\pm 15\%$  50/60 Hz
- 13 115 Volt  $\pm 15\%$  50/60 Hz
- 14 Neutral

## ORDERING DETAILS

- a) Give identification code, i.e. DIN400
- b) Give all details of input signal, both type and range, i.e. 4 to 20mA
- c) Give details of output count rate required, i.e. 0 to 250 counts per hour



**LEE-DICKENS LTD**

Desborough, Kettering, Northants NN14 2QW U.K.  
Tel: (01536) 760156 Fax (01536) 762552