



## Single Level Trip Amplifiers T100 & T110

**Function:** The T100 is a Single Level Trip Amplifier from a single process signal input. The trip action can be arranged so that the Alarm condition can be above (High Trip) or below (Low Trip) the set point, and that the relay can be either normally energised to de-energise in the Alarm condition (Fail-Safe), or normally de-energised to energise in the Alarm condition (Non Fail-Safe). The T110 is a T100 with an edgewise analogue meter in the front panel displaying 0 to 100% of the input span.

Options on the T100/T110 include: a ten-turn set-point potentiometer; a mA retransmitting output; variable hysteresis on the trip relay; an on-board transmitter power supply; a difference between two RTDs input; and a DPDT relay instead of the SPCO relay.

### SPECIFICATIONS

Please note that the following are typical ranges. We also manufacture instruments to cater for other ranges, within limitations detailed below. All instruments come with span and zero potentiometers for fine tuning on site.

#### INPUTS:

##### DC Current

0 to 1mA into 1K ohms  
0 to 10mA into 100 ohms  
4 to 20mA into 62.5 ohms  
10 to 50mA into 25 ohms  
Other current inputs as required  
Minimum current 10µA  
Maximum current 100mA

##### DC Voltage

Between 0 and 250 Volts DC  
Minimum voltage span 5mV  
Maximum voltage span 250V

##### Input Impedance

1M ohms or greater

##### Resistance (2 wire)

Between 0 and 10K ohms  
Minimum span 10 ohms  
Maximum span 10K ohms

##### Potentiometers (3 wire)

Between 0 and 20K ohms  
Minimum span 10 ohms  
Maximum span 20K ohms

##### Resistance Thermometers (RTDs, PT100s)

2 or 3 wire, 100 ohms at 0°C or 130 ohms at 0°C  
Minimum temperature span 10°C  
Maximum temperature span 600°C

##### Thermocouples

Type B, E, J, K, N, R, S & T  
Temperatures covered:

Type	Range	Min Temp	Change
B	600 to 1800°C	400°C	
E	-260 to 1000°C	65°C	
J	-200 to 1200°C	80°C	
K	-260 to 1600°C	100°C	
N	0 to 1300°C	150°C	
R	0 to 2000°C	400°C	
S	0 to 1800°C	400°C	
T	-260 to 800°C	100°C	

Automatic cold junction compensation  
Open circuit thermocouple monitoring upscale or downscale drive

#### OUTPUTS:

**Relay – Contacts**  
One SPCO relay contact

**Contact Ratings**  
Maximum Current 2A  
Maximum Voltage 250 Volt  
Maximum Load 60W 500VA

**Switching Differential**  
0.5% of span approx, adjustable if required

**Switching Mode**  
Relays energises or de-energises on rising or falling signal as specified

**Set Point Dial**  
270° pot calibrated 0 to 100, fitted with locking cursor

Options:  
1) Ten turn locking potentiometer  
2) Remote potentiometer

**Relay State Indication**  
Bi-colour red/green LED  
Green = Stable State  
Red = Alarm State

#### SUPPLY:

**Power Supplies**  
100 to 120 Volt 50/60 Hz  
200 to 240 Volt 50/60 Hz  
or 24 Volt DC with converter to maintain signal to power supply isolation

**Power Required**  
3 Watts Maximum

#### GENERAL:

**Temperature Coefficient**  
± 0.1% of span/ Δ 10°C  
(for inputs > 100mV)  
+ Cold junction error, for thermocouple inputs

**Operating Temperature Range**  
0 to +50°C


**Storage Temperature Range**  
-20 to +85°C

**Operating Humidity Range**  
0 to 95% RH non-condensing

**Storage Humidity Range**  
0 to 95% RH non-condensing

**Weight**  
T100 315 gms  
T110 340 gms

### MECHANICAL DETAILS

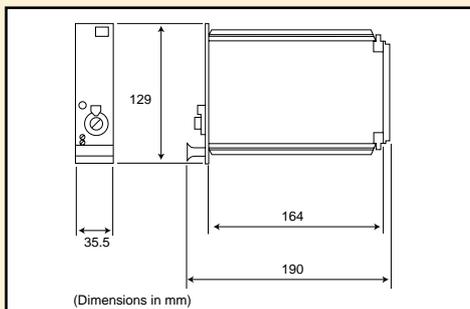

### TERMINATION DETAILS

Termination details are dependent upon input type and upon type of housing chosen (19" rack or DIN rail mounting enclosure) and, if 19" rack, screw terminals or solder terminals. Further details upon request from our internal sales department.

### ORDERING DETAILS

- (a) Give identification code, i.e. T100  
(b) Give power supply voltage, i.e. 240 Volt 60 Hz  
(c) Give details of input signal i.e. Chromel/Alumel thermocouple, span 0 to 250°C.  
(If thermocouple input please specify upscale or downscale burnout drive)  
(d) Give details of trip action required: i.e.
- HNF = High Non Fail Safe
  - HFS = High Fail Safe
  - LFS = Low Fail Safe
  - LNF = Low Non Fail Safe

H =	High Trip	=	Alarm condition above the set point
L =	Low Trip	=	Alarm condition below the set point
FS =	Fail Safe	=	Relay normally energised to de-energise in the alarm condition
NF =	Non Fail Safe	=	Relay normally de-energised to energise in the alarm condition